



Strongroom door type RVD

Grade VII · Grade VIII EX CD · Grade X EX CD · Grade XI EX CD



Burglary protection

The Strongroom doors in Grade VII, VIII, X and XI are tested in accordance with the European standard EN-1143-1.

The Strongroom doors in Grade VIII, X and XI have also passed the explosive and core drill tests and are certified as EX-CD doors.

Description

The Strongroom doors are constructed with a new barrier material.

Locking

As standard the Strongroom doors in Grade VII, VIII and X is provided with 2 and in Grade XI with 3 changeable key-locks type FAS/S&G.

Available as option:

Combination lock or Electronic PIN code lock.

Locks class C as per EN 1300

Door stop holder?

Electricity and alarm system

As standard the Strongroom doors are provided with a switch for automatic power to the Strongroom. The Strongroom doors are provided with alarm cabling between door and frame through one of the hinges and two magnetic switches to indicate open door as standard.

Frame

The frame is designed for wall thickness:

Grade VII & VIII: 350 mm

Grade X: 500 mm

Grade XI: 650 mm

As option the frame can be produced as a grip frame.

Colour

Primer paint






Dimensions and weight

See overleaf.

Dimensions and weight

Strongroom door type RVD

RVD Class	Clear Height	Clear Width	Weight including frame
VII	2 000 mm	900 mm	1 800 kg
VIII EX CD	2 000 mm	900 mm	1 800 kg
X EX CD	2 000 mm	900 mm	2 100 kg
XI EX CD	2 000 mm	900 mm	3 000 kg

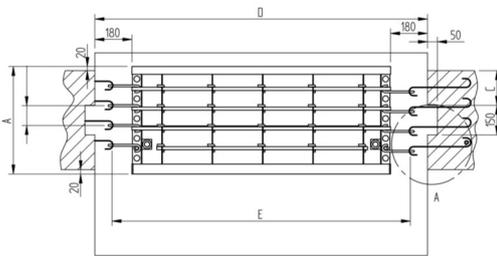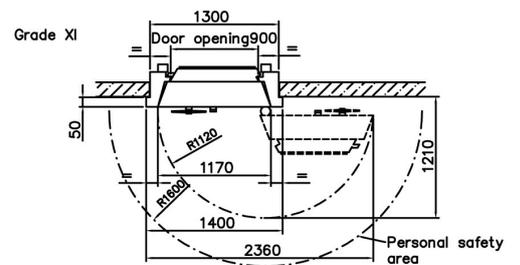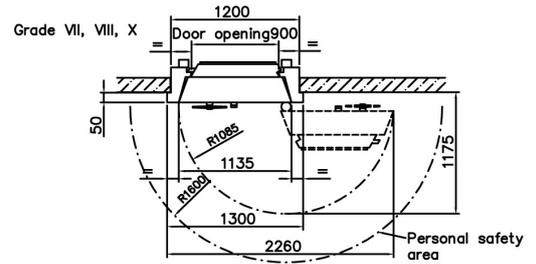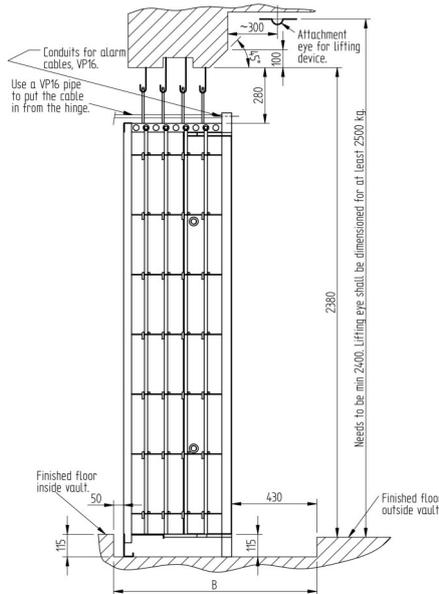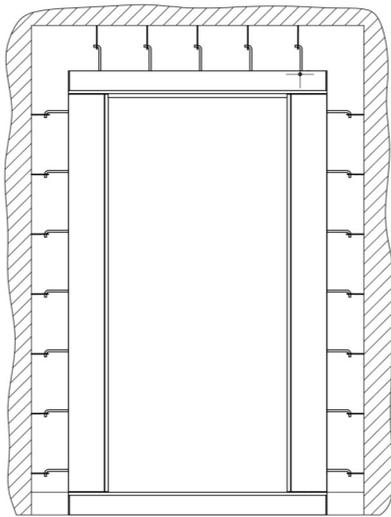

Number of hooks:

Grade VII-VIII: 3x19

Grade X: 4x19

Grade XI: 5x19

Hanging of door and gate:




fig. 1. Door - right hung
Gate - left hung




fig. 2. Door - right hung
Gate - right hung




fig. 3. Door - left hung
Gate - right hung




fig. 4. Door - left hung
Gate - left hung

We reserve the right to alter the specification without prior notice.



Head office

Robur Safe AB

Lundbyvägen 8
SE-311 68 SLÖINGE
Phone: +46 346 260 260
Fax: +46 346 260 222

info@robursafe.com

www.robursafe.com