



Vault doors type RVD

Grade III & V



Burglary protection

The Vault doors in Grade III & V are tested in accordance with the European standard EN 1143-1 and certified by SBSC.

Description

The Vault doors are produced in a construction that contain different protection material.

Locking

As standard the Vault doors are provided with one or two changeable key lock type FAS/S&G 6890.

Grade III: one lock

Grade V: two locks

Available as option:

Mechanical or Electronic combination lock.

Electricity and alarm system

The Vault door is provided with alarm cabling between door and frame through one of the hinges as standard.

Dimensions

Clear height: 2000 mm

Clear width: 900 mm

Frame

The frame is designed for a wall thickness of:

Grade III: 200 mm

Grade V: 250 mm

Colour


Primer paint

Dimensions and weight

See overleaf.

Dimensions and weight

Model	A	B	C	D	Weight
Robur Grade III	220 mm	1236 mm	917 mm	2141 mm	750 kilo
Robur Grade V	270 mm	1252 mm	964 mm	2330 mm	1 100 kilo

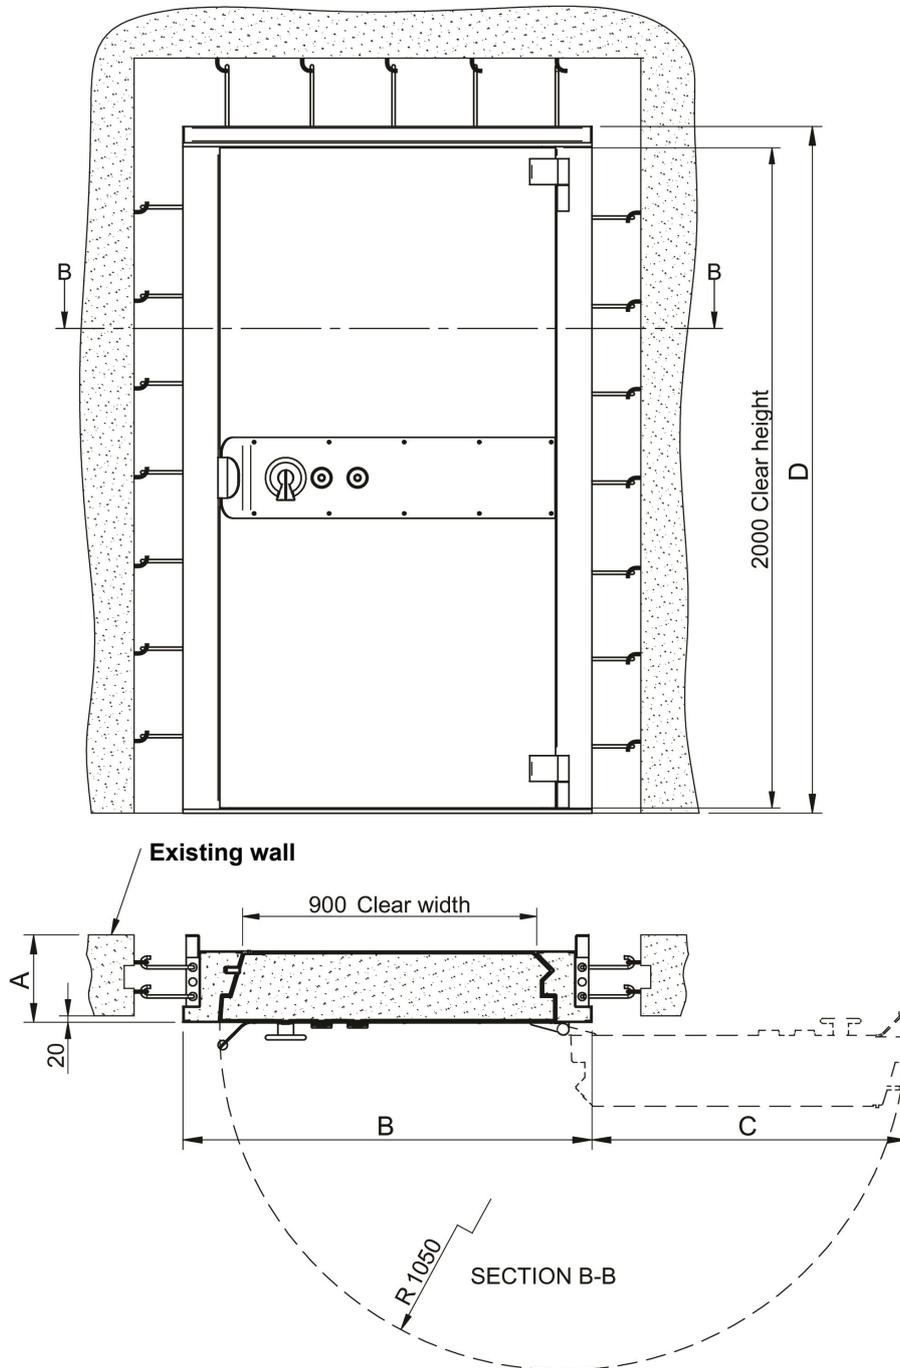

We reserve the right to alter the specification without prior notice.



Head office

Robur Safe AB

Lundbyvägen 8
SE-310 50 SLÖINGE
Phone: +46 346 260 260
Fax: +46 346 260 222

info@robursafe.com

www.robursafe.com